



Accredited to ASA-100
and FAA AC 00-56A




296FR

FR – Lightweight Cargo Compartment Tape

Applications: Cargo pit seam taping & repair. Designed for Tedlar (PVF) and PET cargo liner materials. Covering pins & rivets. Similar applications requiring high adhesion and flame resistance.

- ◆ Glass cloth design resists flame penetration for added safety.
- ◆ Adheres well to Tedlar & Polyester cargo liner materials.
- ◆ High tensile strength.
- ◆ Repositionable acrylic adhesive. Clean removal.
- ◆ Comfortable, accommodates angles & turns.
- ◆ Available with unprinted backing, or with Skip-slit (back slit) liner.

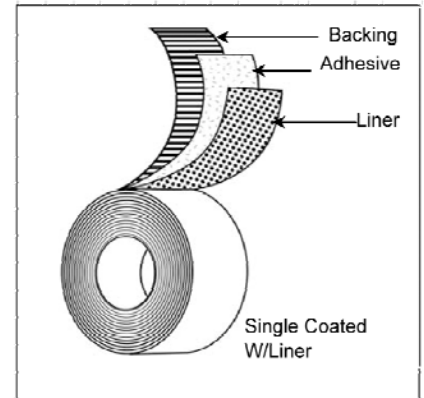

Adhesive	Flame retardant, Bromide-free acrylic
Backing	Printed Fiberglass cloth
Adhesion to backing (PSTC-1)	24 oz/in / 49.3 g/mm
Adhesion to steel (PSTC-1)	45 oz/in / 49.3 g/mm
Adhesion to cargo liner (PSTC-1)	30 oz/in.
Tensile (ASTM D-1000)	134 lb/in / 2.35 kg/mm
Thickness (ASTM D-1000)	7 mils / 0.18 mm
Weight (ASTM D-1000)	6.87 oz / sq. yd. / 210 g/m ²
Specifications	Boeing - BMS 5-146 EU - Directive 76/769/EEC FAR 25.853 (a) FAR 25.855 (d)

Note: The above are typical values and should not be used in writing specifications

For Pricing and Information
please contact:

KIEPURA AVIATION CORP.

61 Church Street

Littleton, New Hampshire 03561 USA

Tel: 603-444-3459 / Fax: 603-444-0790

Toll Free: 1-888-522-8273 (USA/Canada)

Email: info@kiepuraaviation.com

www.kiepuraaviation.com