



Accredited to ASA-100
and FAA AC 00-56A




225FR

Flame Retardant Duct Tape white & silver printed and unprinted

A superior flame retardant polyethylene coated waterproof tape with an exceptionally aggressive adhesive to a variety of substrates including steel and plastic. High adhesion properties eliminate lifting and curling. Comfortable and flexible for ease of installation. Creep resistance maintains seal under heavy loads.

Used in areas where flame retardancy is required. Cargo pit applications for freight carrying aircraft only. Seam sealing (taping) and repair of cargo compartment liners for use on covering pins/rivets where high adhesion and flame resistance is critical. General purpose patch and seal.

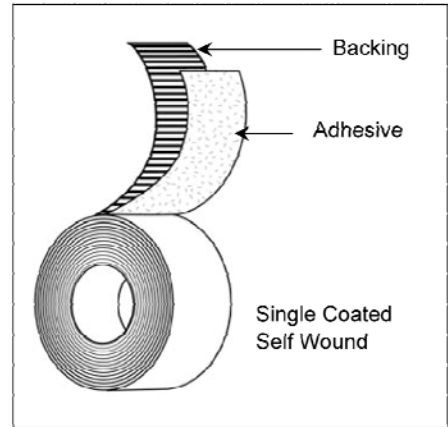

Adhesive

Rubber

Backing

Polyethylene coated cloth

FAR 25.853(a) -
Drip
Length

No drip
5.5 in / 12.7 cm

Adhesion to backing (PSTC-1)

25 oz/in / 28 g/mm

Adhesion to steel (PSTC-1)

40 oz/in / 44.8 g/mm

Tack (PSTC-6)

.5 in.

Tensile (ASTM D-1000)

29 lb/in / 0.52 kg/mm

Thickness (ASTM D-1000)

12 mils / 0.3 mm

Specifications

FAA - FAR 25.853 (a)

Note: The above are typical values and should not be used in writing specifications.

For Pricing and Information

please contact:

KIEPURA AVIATION CORP.

61 Church Street

Littleton, New Hampshire 03561 USA

Tel: 603-444-3459 / Fax: 603-444-0790

Toll Free: 1-888-522-8273 (USA/Canada)

Email: info@kiepuraaviation.com

www.kiepuraaviation.com