



PATCO® D9180
FR Aircraft Waterseal Tape & Corrosion Inhibitor


APPLICATIONS

- Aircraft waterseal applications in main cabin areas including galleys, entryways, lavatories and any areas that are susceptible to moisture damage.
- Surface protection and sound dampening.
- Meets FAR 25.853(a) Appendix F for interior aircraft use.

FEATURES & BENEFITS

- Pressure Sensitive, Repositionable, Flame retardant and Sealant Compatible.
- Tough and durable.
- Moisture resistant.
- Helps prevent corrosion on floor structure.
- Easy and fast to apply.
- Meets all interior FR requirements.
- Can be applied directly over wet sealant.
- Transparent to allow for visual inspection.
- Release liner for wide width usage and die-cuts.

CONSTRUCTION

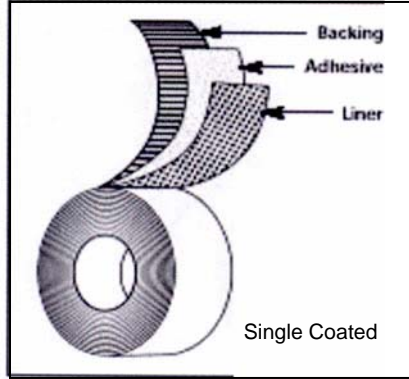

PRODUCT DESCRIPTION

Single-Coated with Liner Construction

Backing:

- Interior-Grade Aromatic Polyurethane

Adhesive:

- Urethane-Based

Liner:

- #92 Coated Kraft Paper

Colors:

- Transparent

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	14 mils	0.356 mm	PSTC-33
Adhesion to Steel	45 oz/in.	50.4 g/mm	ASTM D-3330
Tensile Strength Elongation (%)	100 lb/in.	1.79 kg/mm	ASTM D-3759
Operating Temperature	600 %		
Application Temperature	-65°F to 300°F		
Weight	50°F to 120°F		
	1.415 oz/ft ²		

** Recommended storage conditions: 40-60% Humidity, 60°F-80°F

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate. We recommend the purchaser test the fitness for use for all applications.